



Electromechanical W.L.L.

**PRODUCT CATALOGUE**

# EXCEL AIR 32 - 17 - 0

*Indoor/Outdoor, Paintable, Flexible, Highly Durable  
Anti-Bacterial to use for Air-conditioning Ducts*

## » Description

EXCEL AIR'S 32-17-0 is a one component, highly qualified, lastic-elastic sealant based on an acrylic emulsion. The product is almost odor free and is not corrosive towards metals. After application the product forms a tough rubber by evaporation of water from the sealant. Acrylic prevents air and moisture from passing through cracks & joints.

### COVERAGE RANGE (FSTM 72)

Brush 25-50 sq. ft. /gal (6-1.2m<sup>2</sup>/l) 0.064 in (1.06 mm) - 0.032 in. (0.8 mm) wet film thickness  
Caulking Gun: 125 lineal ft. per 10.5 fluid oz. tube, 1/8 in.

### DRYING TIME 73°F (23°C) (ASTM 1640)

Set to Touch: 1 hour

Dry Through: 24 hour

### WET FLAMMABILITY (ASTM D 3278):

No Flash to boiling, over 210°F (99°C)



## » Color

Light Grey

# EXCEL AIR 32 - 17 - 0

## » Typical Uses

Joints in the building industry between wood, metal window frames, concrete brick work, and air conditioning duct systems. Joints between stairs and walls, between concrete & ceiling elements, between wall and ceiling, skirting boards, window sills and aerated concrete. For Inside & Outside application

## » Application Instruction

Application surface should be clean, dry, sound and free from all contaminants, i.e. dust, rust, grease etc. Cut the nozzle at an angle and apply the sealant with a hand or operated cartridge gun. Tool immediately to spread the sealant against al surface and give a smooth finish. For all details see information sheet of sealant.



## » Precautions

Uncured sealant may irritate eyes, respiratory system and skin. In case of contact with eye, rinse immediately using plenty of water and seek medical advice. Use only in a well-ventilated place. Do not ingest. Keep out of reach of children.


## » Storage Stability

12 months from manufacturing date if kept at a temperature not over 25°C. Protect from freezing.



**32 -17 - 0**  
**DUCT SEALANT**

# Contact Us

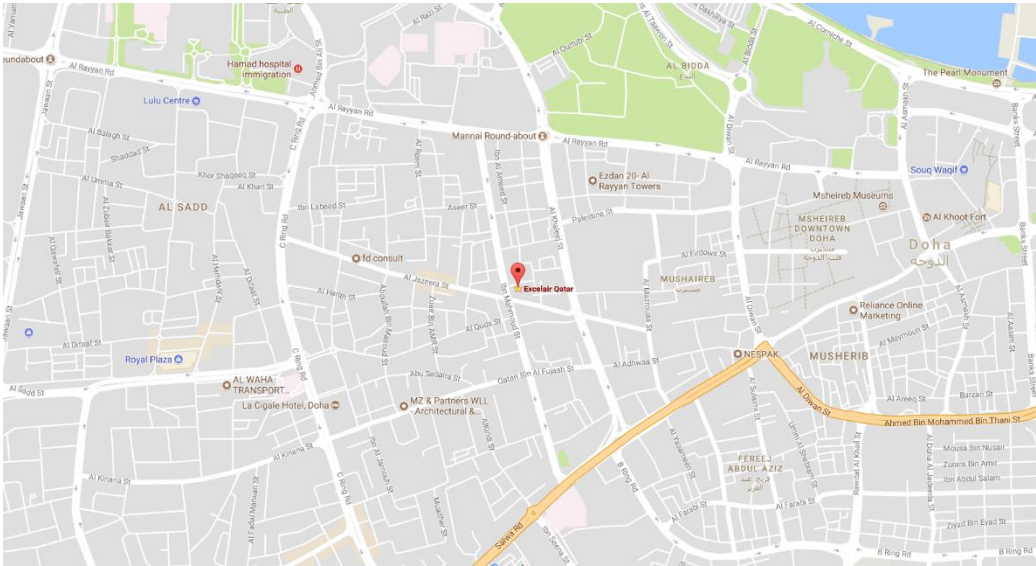

## EXCEL AIR ELECTROMECHANICAL

---

Address: Souq Alkhali Shop No.15 ,  
Bin Mahmoud , Doha - Qatar

P.O. Box: 209032

Tel/Fax: +974 4441 8474

Mob. #: +974 74743430, +974 66571244  
+974 74742602

Email: [excelair@excelairqatar.com](mailto:excelair@excelairqatar.com)

[sales@excelairqatar.com](mailto:sales@excelairqatar.com)

[admin@excelairqatar.com](mailto:admin@excelairqatar.com)

Website: [www.excelairqatar.com](http://www.excelairqatar.com)